

■ DOT PEEN 60x40

STANDARD

- 60x40 dot peen marking module

■ ADVANTAGES


- Intermediate marking window for the dot peen range.
- Simple and robust mechanics.
- Integrated solenoid valve.
- More efficient pneumatic system.
- Options for marking logos, alphanumeric characters and 2D codes.
- Hardness of materials to be marked up to 62 HRC.
- Easier disassembly, without the need to turn the marker over.
- Maximum performance by reducing pressure drops.
- Sliding plate protection option.



SPECIFICATIONS	INTEGRABLE	PORTABLE	BENCHTOP	MIXED
Marking area	60 x 40 mm			
Speed	12 characters/sec			
Air pressure	6 bar			
Heads	Pneumatic (N7SB, N10SB, N14SB, N20SB)			
Cable*	2.5 m	5m	2,5m	5m
Weight Kg	2.7	3,7	33	34

* other lengths: 5, 10 and 15 metres

■ CONFIGURATIONS



INTEGRABLE



PORTABLE




BENCHTOP




MIXED

■ DIMENSIONS


INTEGRABLE 60x40 U

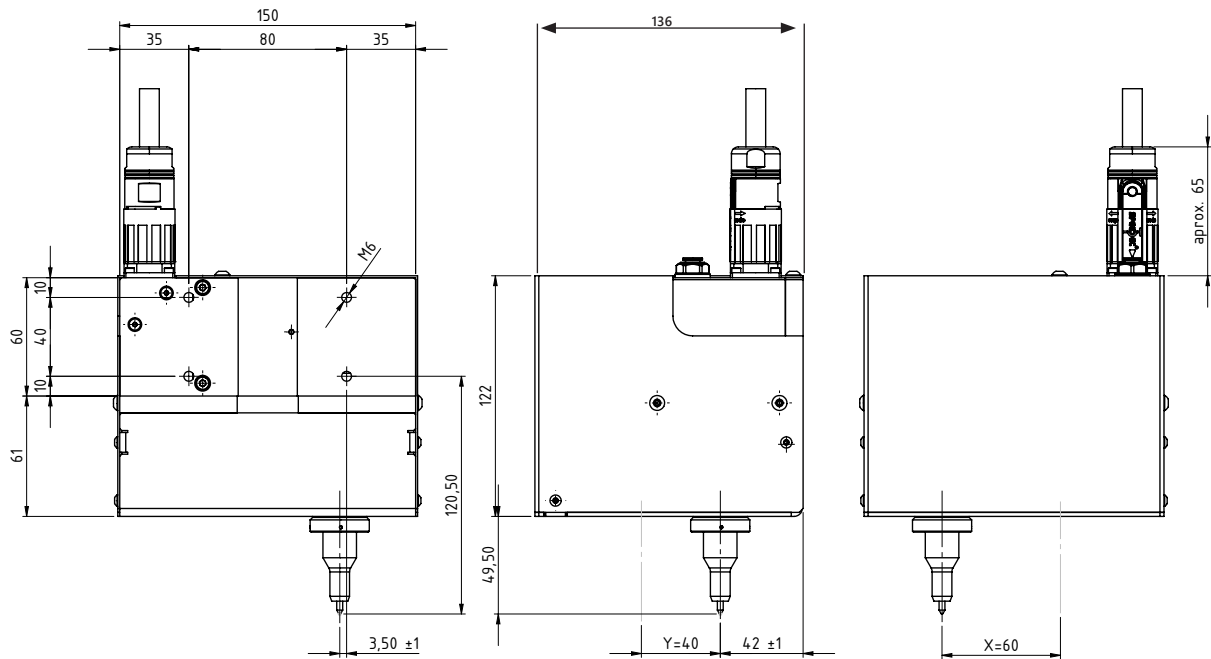

PORTABLE 60x40 P

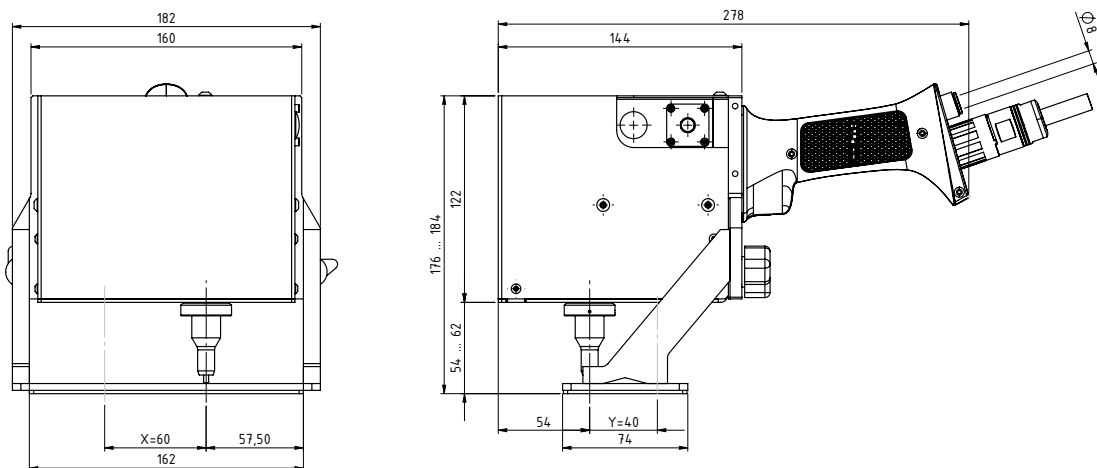

BENCHTOP 60x40 N

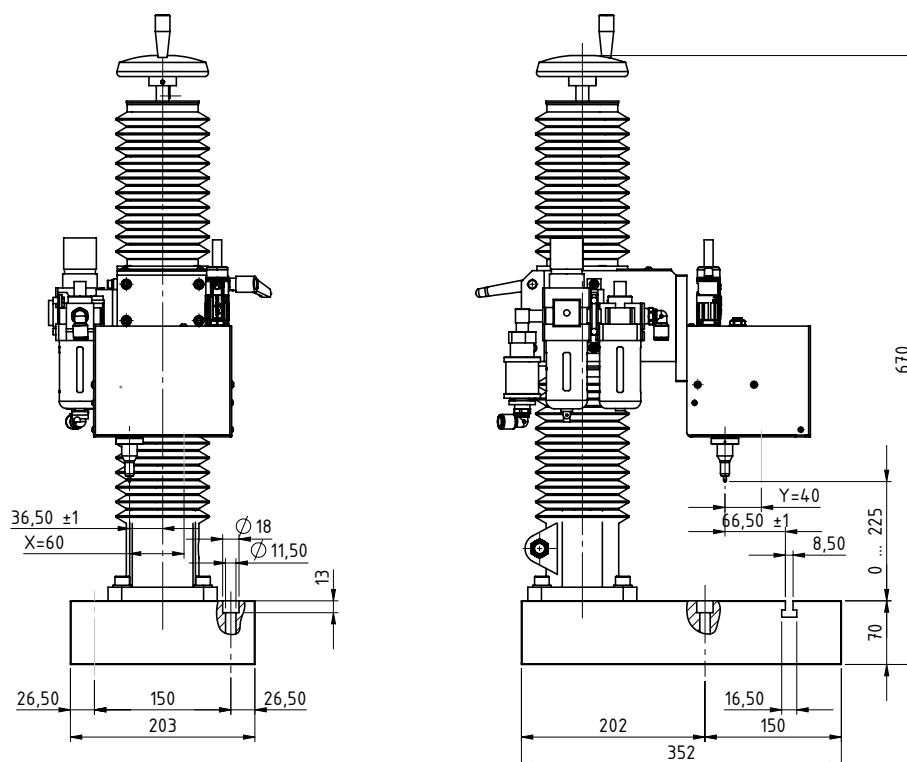

MIXED 60x40 P+N

